



Technical Data Sheet


TOUCHDRY BUTTON OPERATED HAND DRYER – WHITE WITH SILVER GLOSS NOZZLE & BUTTON

Hand Dryers



Scan for information



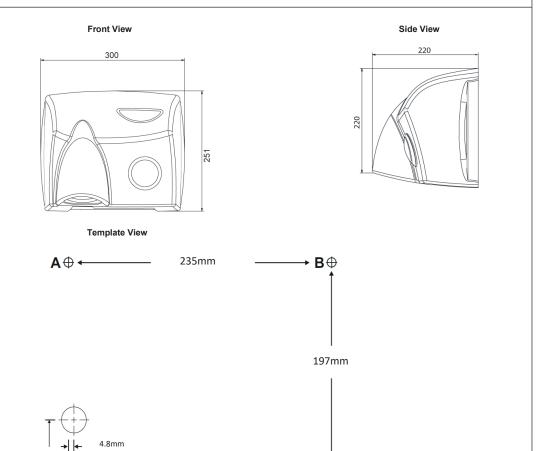

C

PRODUCT OVERVIEW

Heavy duty formed steel (1.6mm) hand dryer. Solid touch button operation. Large fan and motor assembly provides a high performance dryer designed for high traffic areas and heavy use. Easy installation with tamper-proof locking.

Distance from floor as per chart above

KEY FEATURES & SPECIFICATIONS

- Electrical Supply: AC, 220-240V 50/60Hz, 2400 Watt, 10A
- Motor: 200 Watt, Brush Type, Dual Ball Bearings
- RPM: 5,500
- Element: 2200 Watt
- Air Speed: 75.6 km/hr
- Noise Level: 63.8 dB-A @2M
 Division Times Llandau 20 against
- Drying Time: Under 20 seconds
- Weight: 6.2kg (Shipping 7kg)
- Certificate of Suitability No: Q070423
- Electrical Safety Requirement: AS/NZS 60335.2.23:2004
- Protection category: IPX3

ASI JD MacDonald | 13-17 Naxos Way Keysborough, Victoria 3173 Australia | P: (03) 8558 7200 | F: (03) 9548 1141 | www.jdmacdonald.com.au Model No. HDTDWHTSG Revision: R3 Issued: 5/2022 Revised: 15/9/2023

Hand Dryers Page: 1 of 2



Model No. HDTDWHTSG

Technical Data Sheet

OPERATION & MAINTENANCE

User activates dryer by placing hands into chamber under sensor. LED in sensor array shines blue light during operation to guide user to optimal hand placement for shorter drying time. Dryer automatically shuts off after time -out or when user removes hands from sensor zone. Hand drying chamber should be cleaned (see PCM) as per schedule determined by maintenance needs to maintain aesthetic appearance and hygienic conditions.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

| Property | Value |
|--------------|-----------------------------------------------|
| Dimensions | 300 x 251 x 220 mm |
| Construction | White powder coated formed steel, 1.6mm thick |
| Mounting | Surface Mounted |
| Electrical | AC, 220-240V 50/60Hz, 2400 Watt, 10A |

INSTALLATION

Electrical connection by cord & plug (as supplied). Can be direct wired by an electrician. Refer to Operating Instructions and Parts Manual for detailed instructions.

RECOMMENDED INSTALLATION HEIGHT from top edge of hand chamber above finished floor (AFF):

- Men's washroom 1270mm
- Women's washroom 1194mm
- Children's washroom ages 4-7 889mm
- Children's washroom ages 8-10 991mm
- Children's washroom ages 11-13 1092mm
- Children's washroom ages 14-16 1194mm

WARRANTY

10 years (first year parts & labour, remaining 9 years parts only).

ASI JD MacDonald | 13-17 Naxos Way Keysborough, Victoria 3173 Australia | P: (03) 8558 7200 | F: (03) 9548 1141 | www.jdmacdonald.com.au Model No. HDTDWHTSG Revision: R3 Issued: 5/2022 Revised: 15/9/2023